

## KEY FEATURES

- Switching Power Module for PCB Mountable
- 4000VAC Input to Output 2MOPP Insulation
- Cooling by Free Air Convection
- High Efficiency up to 93.5%
- With P.F.C. Function >0.9
- <0.5W No Load Input Power
- Protections: Over Load / Over Voltage / Over Temperature / Short Circuit
- EMI for Both Class I (with PE) and Class II (without PE) Configuration
- Suitable for BF Application with Appropriate System Consideration
- UL / IEC / EN 60601 3.1 Edition & UL / IEC / EN 60950 AM2 Safety Approvals
- 3-Year Product Warranty



## ELECTRICAL SPECIFICATIONS

All specifications valid at 230VAC input voltage, full load and +25°C after warm-up time unless otherwise stated.

Model No.	MQC100-12S	MQC100-24S	MQC100-48S	
Max Output Wattage (W)	100 W			
Input	Voltage (Note 3)	90-264 VAC		
	Frequency (Hz)	47-63 Hz		
	Current (Full load)	< 2.0 A max. (115 VAC) / < 1.0 A max. (230 VAC)		
	Inrush Current (<2ms)	< 45 A max. (115 VAC) / < 90 A max. (230 VAC)		
	Leakage Current	< 0.1mA / 264 VAC (Touch Current)		
	Power Factor	PF>0.9 at Full Load		
Output	Voltage (V.DC.)	12V	24V	48V
	Voltage Accuracy	±2%		
	Current (A) (max.)	8.33	4.2	2.1
	Line Regulation	±1%		
	Load Regulation (0-100%)	±1%		
	Minimum Load	0%		
	Maximum Capacitive Load	6000µF	2000µF	330µF
	Ripple & Nois (max.) (Note 1)	1% Vout		
	Efficiency (at 230VAC) (Note 4)	92.5%	93%	93.5%
Hold-up Time (at 115 VAC) (Note 2)	10 ms min.			
Protection	Over Power Protection	Auto recovery, Hiccup mode		
	Over Voltage Protection	Auto recovery		
	Overt Temperature Protection	Auto recovery		
	Short Circuit Protection	Protection level 1 (nominal) : Continuous, Auto recovery Protection level 2 (instantaneous high current) : Latch		
Isolation	Input-Output	4000VAC or 5656VDC		
	Input-PE	2000VAC or 2828VDC		
	Output-PE	1500VAC or 2121VDC		
Environment	Operating Temperature	-30°C...+70°C (with derating)		
	Storage Temperature	-30°C...+85°C		
	Temperature Coefficient	±0.05%/°C		
	Altitude During Operation	5000m		
	Humidity	95% RH		
	MTBF	>250,000 h @ 25°C (MIL-HDBK-217F, Notice 1)		
	Atmospheric Pressure	56 kPa to 106 kPa		
	Vibration	IEC60068-2-6 (10-500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes)		
Shock	IEC60068-2-27			

## ELECTRICAL SPECIFICATIONS


All specifications valid at 230VAC input voltage, full load and +25°C after warm-up time unless otherwise stated.

Model No.	MQC100-12S		MQC100-24S	MQC100-48S
Physical	Dimensions (L x W x H)		4.3 x 2.3 x 1.38 Inches ( 109.0 x 58.5 x 35.0 mm ) Tolerance ±0.5 mm	
	Weight		365 g	
	Cooling Method		Free convection	
Safety	Approval		UL / IEC / EN 60601 3.1 <sup>rd</sup> Edition (2 x MOPP), UL / IEC / EN 60950 AM2, UL / IEC / EN 62368	
EMC	Conducted EMI	(Note 5)	EN55011 Conducted Class B	
	Radiated EMI	(Note 5)	EN55011 Class I class B / Class II class A	
	EMS		EN60601-1-2 4th edition	

## NOTE


- Ripple & Noise are measured at 20MHz of bandwidth with 0.1uF & 47uF parallel capacitor.
- Hold-up Time measured at 90% Vout.
- Please check the derating curve for more details.
- After 30 minutes of burn-in
- Please secure the power supply unit to your metal case by using the four screw holes in the corners for either Class I or Class II equipment
- CAUTION: Double pole, neutral fusing. Disconnect mains before servicing.**  
**(ATTENTION : 2 poles avec fusible sur le neutre. Deconnecter le secteur avant intervention.)**
- Please refer to our PDF file "AC-DC Application" on our website: [www.archcorp.com.tw](http://www.archcorp.com.tw)

## DERATING

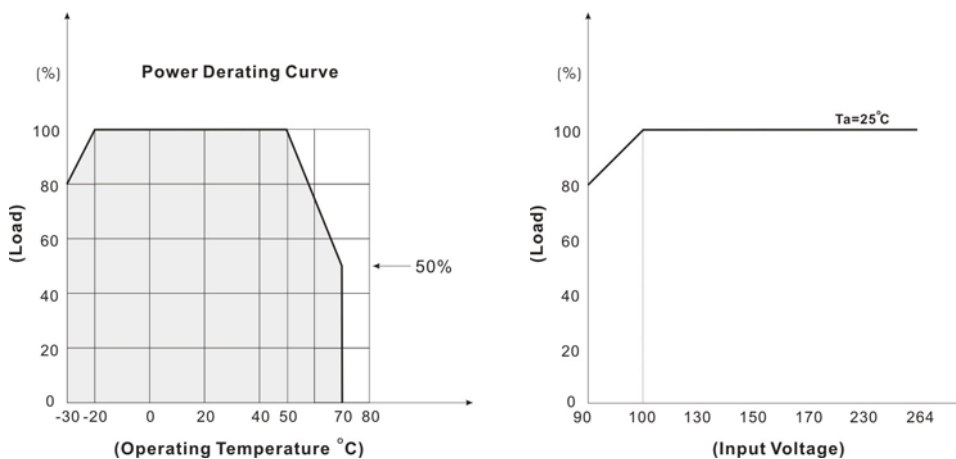

## TRIM

	12S		24S		48S	
Trim → -V	+5%	0%	+5%	0%	+5%	0%
	34KΩ	~ 10MΩ	37.4KΩ	~ 10MΩ	38KΩ	~ 10MΩ
Trim → +V	0%	-5%	0%	-5%	0%	-5%
	10MΩ	~ 106KΩ	10MΩ	~ 270KΩ	10MΩ	~ 640KΩ

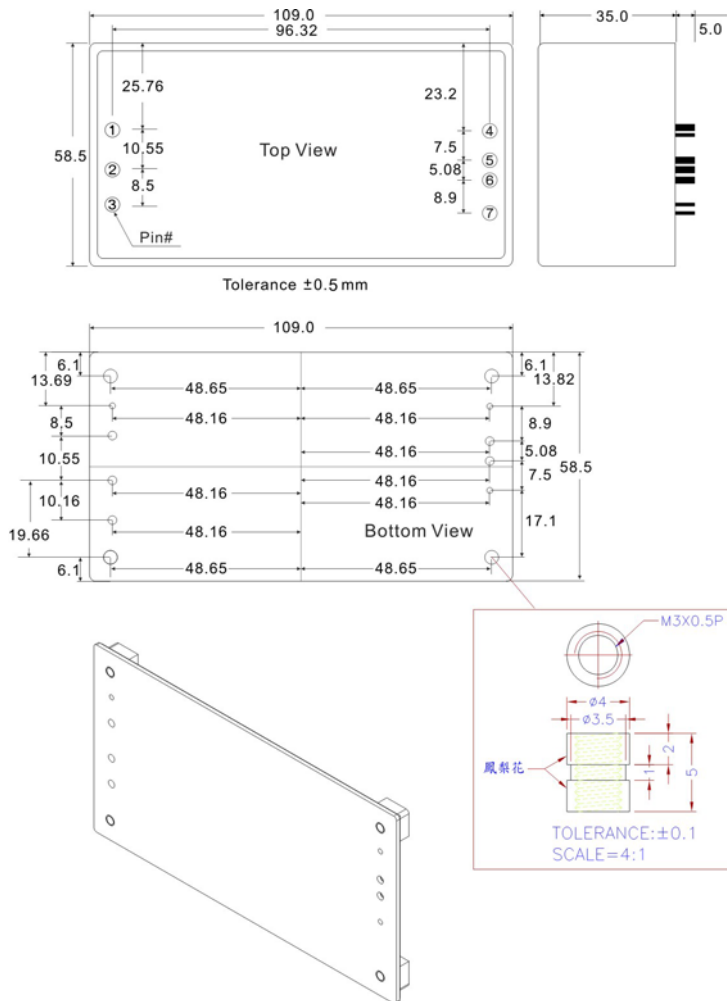**MECHANICAL DIMENSIONS ( Top View )**


PIN#	$\Phi$	Single
1	1.2 $\pm$ 0.3mm	AC IN (N)
2	1.2 $\pm$ 0.3mm	AC IN (L)
3	1.2 $\pm$ 0.3mm	PE
4	1.2 $\pm$ 0.3mm	ON / OFF (Provide +5Vdc Controlled)
5	1.8 $\pm$ 0.3mm	+DC OUT
6	1.8 $\pm$ 0.3mm	-DC OUT
7	1.2 $\pm$ 0.3mm	Trim

**Remark:**

Please reserve the pin 4 hole on PCB.

If the remote on/off function is not required, please connect the pin 4 circuit layout with pin6, or keep pin 4 floating.

**BLOCK DIAGRAM**
